



- Indoor installation
- Sheet steel construction
- Vandal resistant polycarbonate glass
- Epoxy painted
- Key lock



AVTPS housings have been designed for surveillance applications in places highly exposed to vandalism (underground parking lots, subway stations, prisons, police stations, corridors, supermarkets, etc).

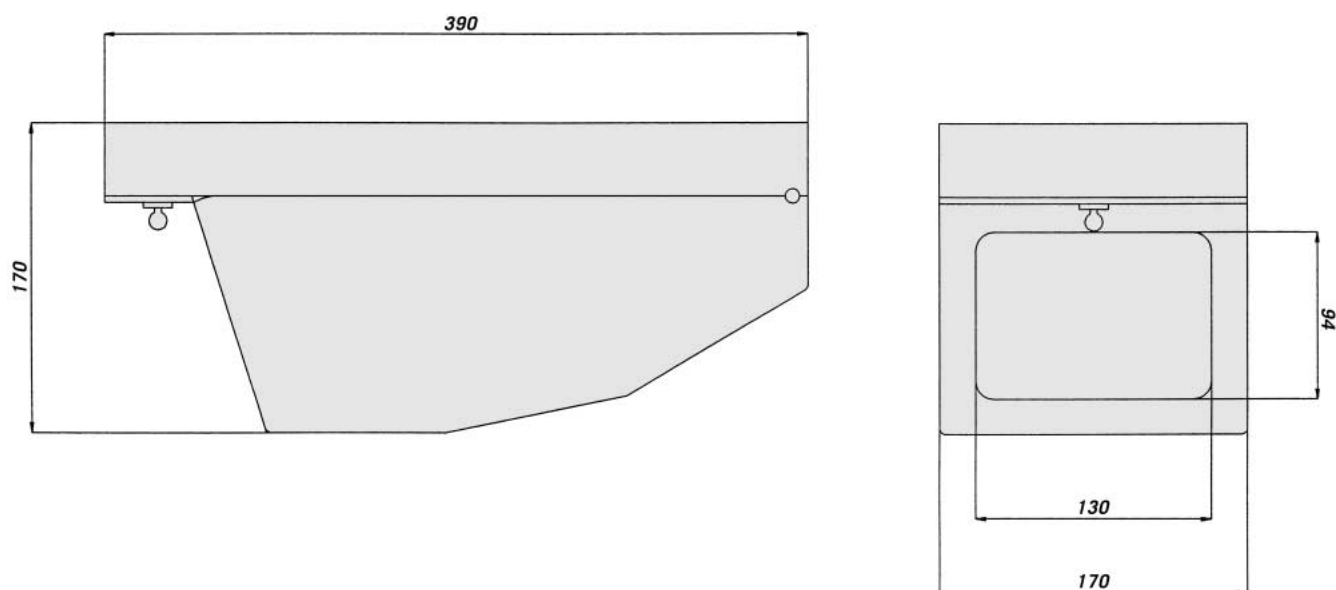
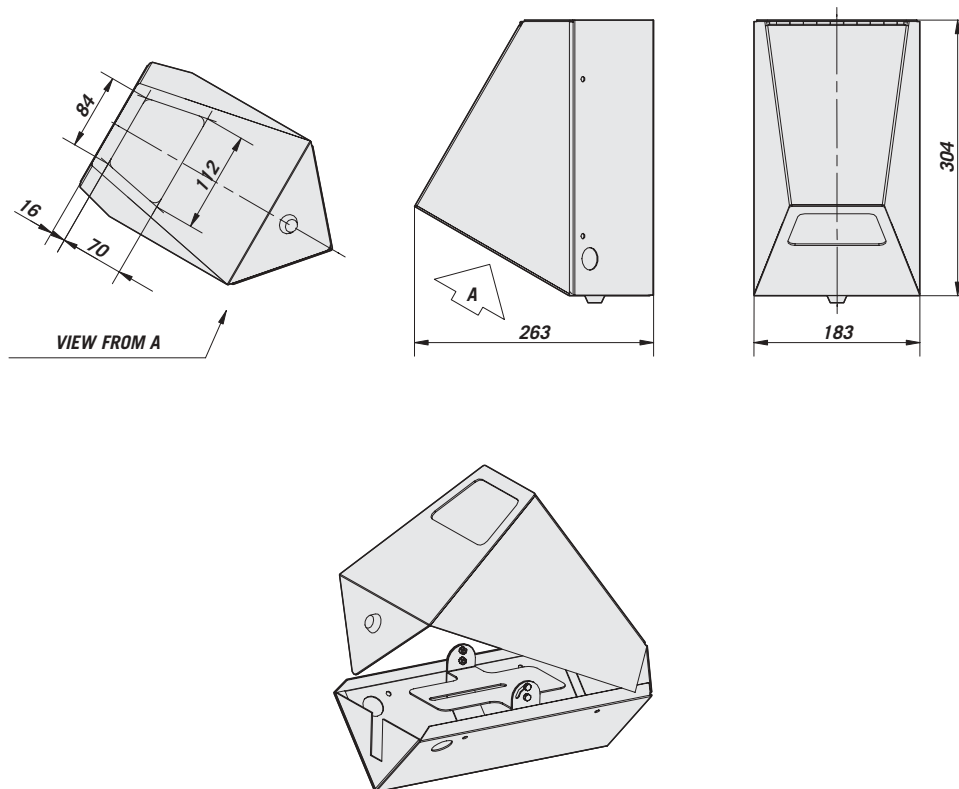
Three models are available: AVTPSK ceiling housing, AVTPSA corner housing, AVTPSAM mini corner housing. All models are made of sheet steel (3 mm thick) and painted with epoxypolyester powder RAL9002.

They are equipped with an internal bracket for the camera attachment and adjustment. The compass opening allows ease of installation.

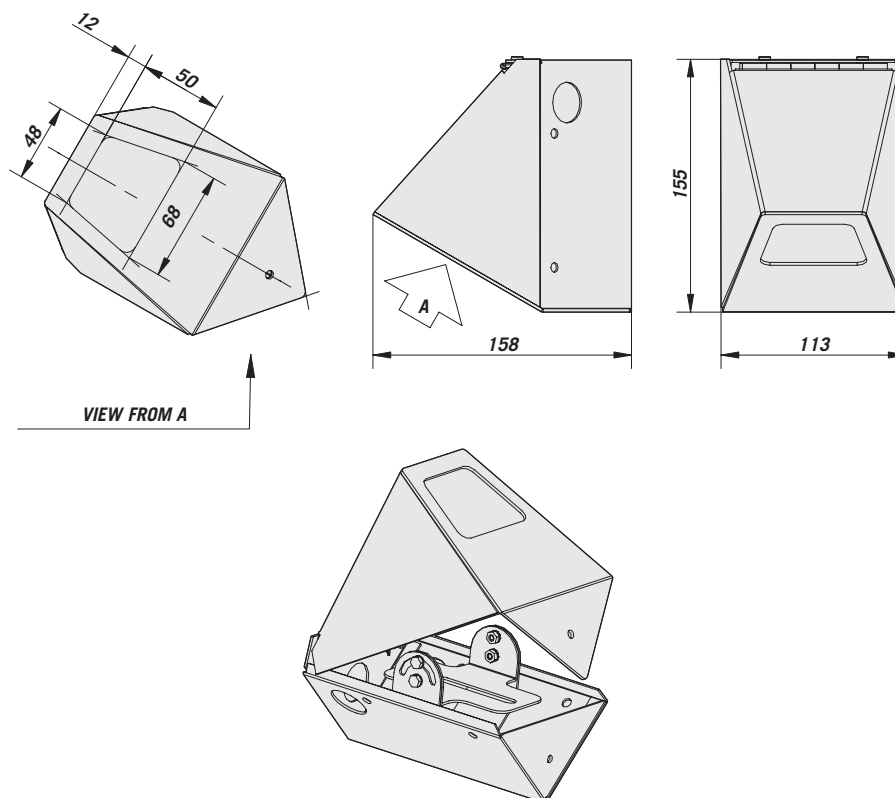
The units are key locked, except for AVTPSAM mini corner housing, which is fitted with screw lock. A vandal resistant polycarbonate glass is fixed on the front by means of an iron frame. The cable outlet is made possible on both sides (left or right) due to special holes.

Options available for AVTPSK model: heater kit, camera power supply and alarm switch in case of opening.

MODELS	
AVTPSK	Tamperproof wedge camera housing
AVTPSA	Tamperproof corner mount housing
AVTPSAM	Tamperproof mini corner mount housing

**AVTPSK****AVTPSA**

The values are in millimeters.

AVTPSAM


The values are in millimeters.



TECHNICAL DATA

GENERAL

- Sheet steel 3 mm thick (0.12 in)
- Epoxypolyester powder painted RAL9002
- Iron frame
- Vandal resistant polycarbonate glass 4 mm (0.15 in) thick
- Compass opening

MECHANICAL

AVTPSK

- External dimensions (WxHxL): 170x170x390 mm (6.69x6.69x15.35 in)
- Internal usable area: 110x90 mm (4.33x3.54 in)
- Usable length: 180 mm (7.08 in)
- Individual key locked
- Cable outlet on both sides (left or right) due to special holes and two PG9 cable glands or through wall
- Window dimensions: 130x94 mm (5.1x3.7 in)

AVTPSA

- External dimensions (WxHxL): 305x180 x265 mm (12x7.28x10.43 in)
- Internal usable area: 75x65 mm (2.95x2.55 in)
- Usable length: 200 mm (7.87 in)
- Individual key locked
- Cable outlet through wall
- Window dimensions: 112-84x70 mm (4.4-3.3x2.75 in)

AVTPSAM

- External dimensions (WxHxL): 155x110x160 mm (6.1x4.33x6.29 in)
- Internal usable area: 45x45 mm (1.77x1.77 in)
- Usable length: 100 mm (3.93 in)
- Vandal proof screw lock
- Cable outlet through wall
- Window dimensions: 68-48x50 mm (2.67-1.88x1.96 in)

ELECTRICAL

Heater, Ton 15°C+/-3°C (59°F) Toff 22°C +/-3°C (71°F):

OAVTPSH1 IN 12VDC/24VAC, consumption 20W

OAVTPSH2 IN 115/230VAC, consumption 40W

Camera power supply:

OAVTPSPS1 IN 230VAC, 50Hz - OUT 12VDC, 400mA max

OAVTPSPS2 IN 230VAC, 50Hz - OUT 24VAC, 400mA max

ACCESSORIES

OTPSTA Tamper switch for AVTPSK

OAVTPSH1 Heater IN 115/230VAC, for AVTPSK

OAVTPSH2 Heater IN 12VDC/24VAC, for AVTPSK

OAVTPSPS1 Camera power supply
IN 230VAC - OUT 12VDC, for AVTPSK

OAVTPSPS2 Camera power supply
IN 230VAC - OUT 24VAC, for AVTPSK

ENVIRONMENTS

- Indoor

COMPLIANCE TO

- CE according to EN 61000-6-3, EN 60065, EN 50130-4
- IK10

SPARE PARTS LIST

OSER1 Spare key/lock for AVTPSK and AVTPSA

OSER2 Spare key/lock for AVTPSK and AVTPSA (same key/lock)



Unit Weight (kg / lb):

AVTPSK: 6,47 / 14.26

AVTPSA: 3,97 / 8.75

AVTPSAM: 1,1 / 2.42

Package Weight (kg / lb):

AVTPSK: 6,8 / 15

AVTPSA: 4,4 / 9.7

AVTPSAM: 1,4 / 3.08

Package Dimensions (cm / in):

AVTPSK: 21x21x42 / 8.26x8.26x16.53

AVTPSA: 23,5x31,5x24,5 / 9.25x12.4x9.64

AVTPSAM: 19x19x19 / 7.48x7.48x7.48

Master Carton (units):

AVTPSK: 5

AVTPSA: 6

AVTPSAM: 12